

Power It




RACK SERVER



Colocation Rack



Server Rack

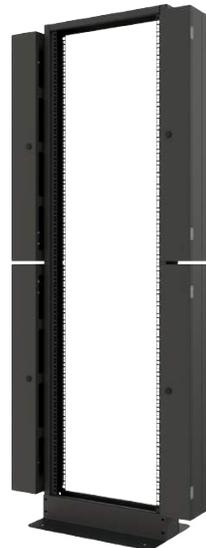

Open Rack



Wallmount Rack

Rack Server features a massive front to rear ventilation capacity that meets or exceeds server manufacturer requirements. Its integrated baying tabs make it easy to combine multiple enclosures in rows for data center applications. This enclosure is also compatible with hot-aisle/cold-aisle configurations.

With its locking, reversible, removable front and rear doors, and locking, removable side panels, Rack Server provides ultimate equipment safety. The side panels are half size for ease of removal and reinstallation. The split rear door design allows the enclosure to be placed closer to a wall. Rack Server meets all requirements toward PCI DSS compliance.

All components of Rack Server are grounded to the enclosure frame. Front and rear threaded grounding points are provided for connection to the facility earth ground. The removable front and rear doors feature quick-release ground wires.



Colocation Rack

FEATURES

- Available size :
 - 45U splitted 3 section (15U per section)
 - 42U splitted 2 section (21U per section)
- Standard 19" mounting hole for server components
- Unique Key for each compartment
- Powder coated (Black Sandy, Black Textured)
- Include closed cable tray for each colocation
- Include universal mounting for PDU
- Ingress Protection : IP 20
- Top & bottom cable Entry (c/w brush seal)
- Use caster 2 inch with nylon material for movement
- Use Levelling Feet

	Compartment	Size	Width (W)	Depth (D)
45U Colocation Rack	3 Section	45U - 19"	600	1200
	3 Section	45U - 19"	800	1200
	3 Section	45U - 19"	600	1100
	3 Section	45U - 19"	800	1100
	3 Section	45U - 19"	600	1000
	3 Section	45U - 19"	800	1000
42U Colocation Rack	2 Section	42U - 19"	600	1200
	2 Section	42U - 19"	800	1200
	2 Section	42U - 19"	600	1100
	2 Section	42U - 19"	800	1100
	2 Section	42U - 19"	600	1000
	2 Section	42U - 19"	800	1000

Server Rack



FEATURES

- Standard 19" mounting hole for server components
- Single front door & double rear door
- Perforated front & rear door
- Available Unique Key for each compartment and Common Key
- Available 2 type :
 - 1500 kg static load (heavy duty) for 42u & above
 - < 1000 kg static load
- Powder coated (Black Sandy, Black Textured)
- Include universal mounting for PDU
- Ingress Protection : IP 20
- Top & bottom cable Entry (c/w brush seal)
- Use caster 2 inch with nylon material for movement
- Use Levelling Feet

Size	Width (W)	Depth (D)
42U - 48U	600	1200
42U - 48U	800	1200
42U - 48U	600	1100
42U - 48U	800	1100
42U - 48U	600	1000
42U - 48U	800	1000
42U - 48U	600	900
42U - 48U	800	900
42U - 48U	600	800
42U - 48U	800	800
42U - 48U	600	600

Size	Width (W)	Depth (D)
30U	600	1200
30U	600	1100
30U	600	1000
30U	600	900
30U	600	800
30U	600	600
20U	600	1100
20U	600	1000
20U	600	900
20U	600	800
20U	600	600

Open Rack



FEATURES

- Standard 19" mounting hole for server components
- Available size : 42U and 45U
- Powder coated (Black Sandy, Black Textured)
- Include box for cable management
- Available customize design with 4 caster for easy movement



Wallmount Rack



FEATURES

- Standard 19" mounting hole for server components
- Single front door
- Perforated front door
- Available Unique Key for each compartment and Common Key
- Powder coated (Black Sandy, Black Textured)
- Ingress Protection : IP 20
- Top & bottom cable entry
- Available feet 4 pcs (for optional standing)
- Fan Axial 1 pcs in top/bottom (optional)

Size	Width (W)	Depth (D)
4U	600	600
6U	600	600
8U	600	600
9U	600	600
10U	600	600
12U	600	600
15U	600	600
18U	600	600